


Eot Crane Parts • Brakes • DSL Busbar • Current Collector • Festoon • Pendant Station • Limit Switch

# Energy and Data Transmission

## CP Series Conductors

Round cable with dual strain relief cords

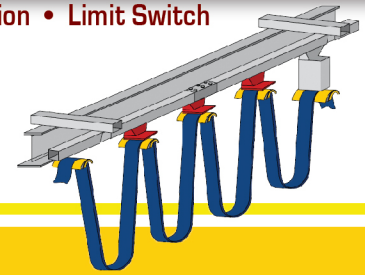

### ROUND PENDANT CABLE

#### ROUND CABLE WITH DUAL STRAIN RELIEF STEEL WIRES - SO5VVD7-F

Made for heavy duty applications in particular for pendant push button stations and moving electromechanical components. The two steel wire ropes are embedded, diametrically opposed to PVC sheathing. The rope cut into lengths and just hooked the steering control to avoid any stress on the cable.




- Comply with CEI 20 - 22 II (flame resistant)
- Insulation class 2/3
- Operational voltage 300/500V
- Sheathing colour : **Black**
- Internal conductors with flexible PVC Sheathing progressively numbered, plus earth conductor (yellow/green)
- Operating temperature: -5°C +70°C
- Ø 2mm steel wires
- Breaking point: 60 kg/mmq

CODE	Cable Range N° CROSS SECTION (Core X mm)	APPROXIMATE OUTER DIMENSIONS CABLE Ø	WIRE ROPE	STRAND n./ mm	APPROXIMATE WEIGHT gr/m	TOTAL CROSS SECTION mm <sup>2</sup>
CT0815AUA FN	8X1,5	11,6	23,6	30X0,25	225	12
CT1215AUA FN	12X1,5	14,4	26,4		315	18
CT1615AUA FN	16X1,5	16	28		415	24
CT1815AUA FN	18X1,5	17	29		470	27
CT2015AUA FN	20X1,5	18	30		525	30
CT2415AUA FN	24X1,5	21	33		620	36

#### Other products : Push Button Pendant Station (Single/Dual Speed)



#### C-Rail Festoon System & Cable Trolleys

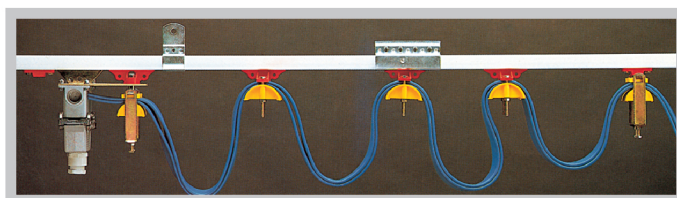

#### Shrouded DSL Bus Bar

