


Eot Crane Parts • Brakes • DSL Busbar • Current Collector • Festoon • Pendant Station • Limit Switch

Energy and Data Transmission

CP Series Conductors


Flat cables

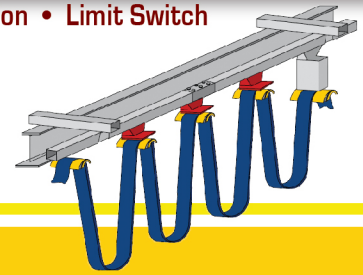

FLAT CABLE

PVC FLAT CABLES ANTI-AGING HO7VVH6-F

Particularly suitable for supply and control circuits, lifting and handling equipment.

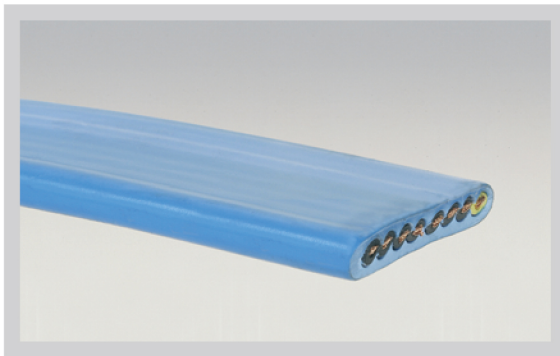

- Comply with CEI 20 - 22 II (flame resistant)
- Insulation class 2/3
- Operational voltage 450/750V
- Sheathing colour : **Black**
- Internal conductors with flexible PVC sheathing progressively numbered, plus earth conductor (yellow/green)
- Operating temperature -5 °C +70 °C

CODE	Cable Range		STRAND n./mm	APPROXIMATE WEIGHT gr/m	TOTAL CROSS SECTION mm ²	CODE	Cable Range		STRAND n./mm	APPROXIMATE WEIGHT gr/m	TOTAL CROSS SECTION mm ²
	N° CROSS SECTION (Core X mm)	APPROXIMATE OUTER DIMENSIONS					N° CROSS SECTION (Core X mm)	APPROXIMATE OUTER DIMENSIONS			
CP0415AFN	4X1,5	15X5,2	30X0,25	150	6	CP2425AFN	24X2,5 *	54X13	50X0,25	1.100	60
CP0815AFN	8X1,5	29X5,5		300	12	CP0404AFN	4X4	21X7,5	56X0,30	330	16
CP1215AFN	12X1,5	41X5		420	18	CP0804AFN	8X4	38X5		550	32
CP1615AFN	16X1,5	54X8		510	24	CP0406AFN	4X6	24X8	84X0,30	440	24
CP1815AFN	18X1,5	43X11		700	27	CP0806AFN	8X6	38,5X8		742	48
CP2415AFN	24X1,5	51X13		1.000	36	CP0410AFN	4X10	35X11	7X12X0,40	800	40
CP0425AFN	4X2,5	21X5,7	50X0,25	240	10	CP0416AFN	4X16	36,5X12	7X18X0,40	1.200	64
CP0825AFN	8X2,5	33X6		420	20	CP04250AFN	4X25	43X13	7X28X0,40	1.700	100
CP1225AFN	12X2,5	50X7		640	30	CP0435AFN	4X35	50X14	7X39X0,40	2.050	140
CP1625AFN	16X2,5	41X13		1.000	40						
CP1825AFN	18X2,5*	50X13		1.050	45						

On request the same cables can be supplied - minimum requirement is 500 m - with heat resistant upto 105° tinned red copper shield.

* Minimum supply 500 m.

Other Products: Current Collectors, Shrouded DSL Bus Bar, DSL Indication Lamp, Crane Anti Collision Device, Master Controller, Resistance Box, Festoon Cable Trolleys, Crane Buffer, Crane Hook Block