



[www.powermechengineering.in](http://www.powermechengineering.in)

# Couplings for Cranes


## FEATURES

- Compact Assembly
- Larger Bore Capacities
- High Power To Weight Ratio
- Accommodates Angular, Parallel & Axial Misalignments
- Extensively used for cross traverse and long travel line shaft drives.

## APPLICATION AREAS


- Steel Mill
- Sugar Mill
- Paper Mill
- Power Plants
- Cement Mill
- Construction Projects



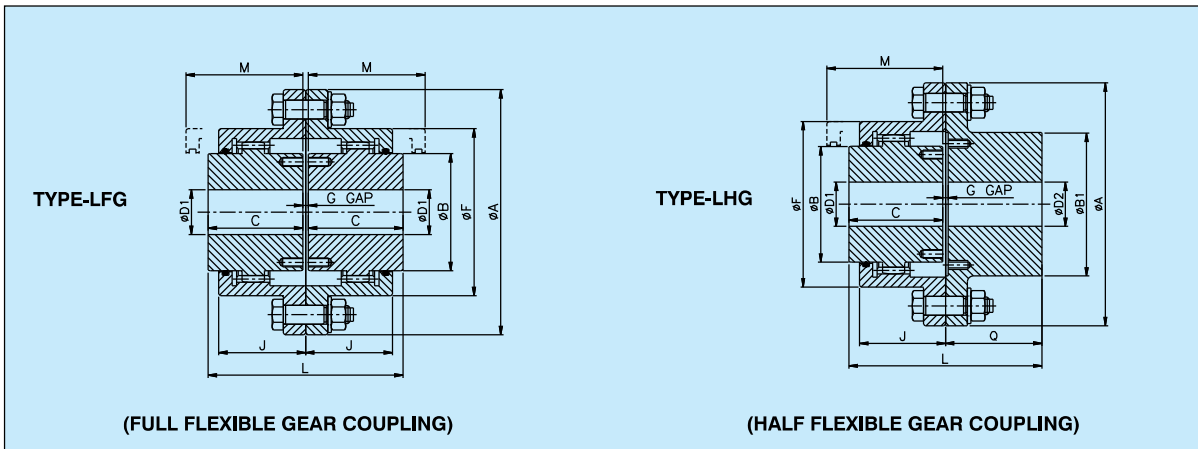

**TECHNICAL DATA - TYPE LFG / LHG**

Coupling Size	Coupling Rating		Max. Speed rpm	Bore			ØA	ØB	ØB1	C	ØF	G	J	L	M	Q	Weight in kg.	
	kW at 100 RPM	Rated Torque Nm		Min	Max												LFG	LHG
100	5.2	497	7600	10	35	45	120	50	65	45	75	3	39.5	93	55	46.5	4.2	4.2
101	10.5	1002	6300	20	50	60	170	65	85	55	110	5	49.0	115	65	57.5	11.0	11.0
102	26.1	2492	5000	30	60	75	185	85	110	70	125	5	62.0	145	80	72.5	15.0	15.0
103	47	4486	4000	40	75	90	220	105	130	85	150	5	78.0	175	105	87.5	20.0	25.0
104	89	8495	3350	50	90	110	250	130	160	105	175	5	96.0	215	125	107.5	39.0	40.0
105	136	12982	2800	60	110	130	290	155	185	110	200	10	106.0	230	140	115.0	57.0	60.0
106	209	19950	2500	75	125	150	320	175	215	125	230	10	117.0	260	155	130.0	80.0	85.0
107	366	34936	2100	90	140	170	350	205	240	140	260	10	134.0	290	175	145.0	103.0	106.0
108	470	44864	1900	105	160	200	380	230	285	155	290	10	147.0	320	190	160.0	138.0	149.0
109	585	55841	1700	125	180	220	430	250	315	165	330	10	156.0	340	205	170.0	170.0	210.0
110	856	81709	1400	140	220	260	490	310	370	180	390	10	171.0	370	220	185.0	264.0	271.0

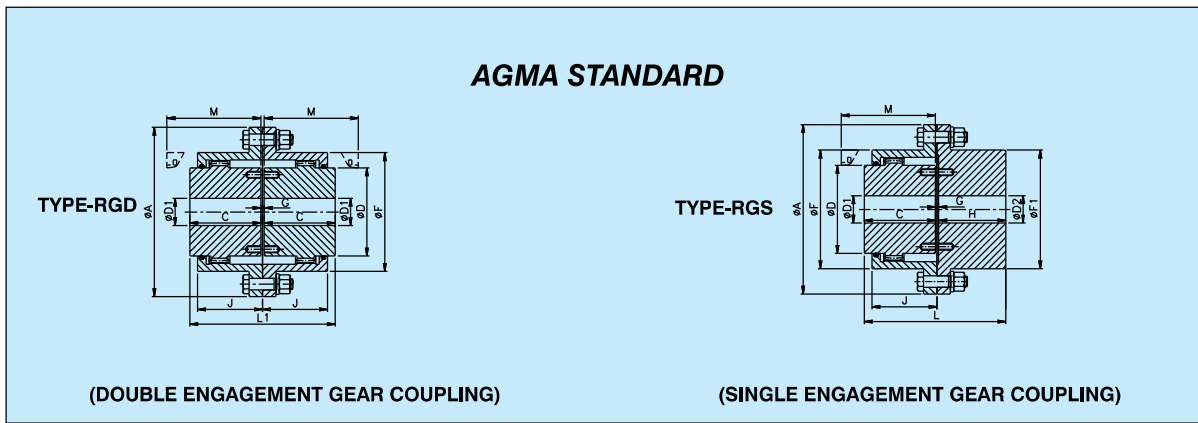

**TECHNICAL DATA - TYPE RGD / RGS**

Coupling Size	Coupling Rating		Max. Speed rpm	Bore (Flex Hub)				Bore (Rigid Hub)				Gap (G)		H	J	L	L1	M	Wt. in kg.		
	kW at 100 RPM	Rated Torque Nm		D1		D2		ØA	C	ØD	ØF	ØF1	RGD						RGS	RGD	RGS
	Min	Max		Min	Max																
10	12.5	1200	8000	14	52	18	60	116	43	69	84	84	3	4	40	39	87	89	51	4.4	4.5
15	26.1	2500	6500	22	65	26	80	152	50	86	105	107	3	4	47	48	101	103	61	9.0	9.5
20	52.1	5000	5600	27	80	30	90	178	62	105	127	130	3	4	59	60	125	127	76	15.0	15.5
25	90.7	8700	5000	32	98	37	110	213	77	131	155	157	5	5	74	72	156	159	92	27.0	27.5
30	134.4	12900	4400	42	115	44	130	240	91	152	181	182	5	5	88	84	184	187	106	40.0	41.5
35	202.2	19400	3900	47	135	52	150	279	107	178	211	212	6	6	102	98	215	220	130	65.0	67.0
40	317.9	30500	3600	47	160	52	180	318	121	210	250	250	6	8	116	111	245	248	145	96.0	100.0
45	435.6	41800	3200	52	180	57	200	346	135	235	274	276	8	8	131	123	274	278	165	131.0	135.0
50	594.0	57000	2900	72	195	77	220	389	153	254	306	309	8	9	148	141	310	314	183	186.0	195.0
55	844.1	81000	2650	72	215	77	240	425	168	279	334	334	8	9	173	158	350	344	203	247.0	261.0
60	990.0	95000	2450	77	235	82	260	457	188	305	366	366	8	9.5	187	169	385	384	228	299.0	316.0
70	1531.0	147000	2150	92	280	102	300	527	221	356	425	425	9	11	220	196	452	451	266	473.0	500.0