

Limit switches to prevent over travel

Two way lever limit switch for EOT Cranes and Hoists

Position switch – FFH

Over Traverse Limit Switch

Picture

Model: FFH2C-1

contact open
 contact close



2NC
Lever adjustable

X-ray view


Versions

www.powermechengengineering.in

FFH2C	single speed	<p>3 positions automatic return to "0" with mechanical interlock (●)</p>	<table border="1"> <tr><td>3-4</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> <tr><td>1-2</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> <tr><td>Cont. Pos.</td><td>-65°</td><td>0</td></tr> <tr><td></td><td>0</td><td>+65°</td></tr> </table>	3-4	<input type="checkbox"/>	<input type="checkbox"/>	1-2	<input type="checkbox"/>	<input type="checkbox"/>	Cont. Pos.	-65°	0		0	+65°
			3-4	<input type="checkbox"/>	<input type="checkbox"/>										
1-2	<input type="checkbox"/>	<input type="checkbox"/>													
Cont. Pos.	-65°	0													
	0	+65°													
FFH2C-1	single speed	<p>3 positions automatic return to "0" with mechanical interlock (●)</p>	<table border="1"> <tr><td>3-4</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> <tr><td>1-2</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> <tr><td>Cont. Pos.</td><td>-65°</td><td>0</td></tr> <tr><td></td><td>0</td><td>+65°</td></tr> </table>	3-4	<input type="checkbox"/>	<input type="checkbox"/>	1-2	<input type="checkbox"/>	<input type="checkbox"/>	Cont. Pos.	-65°	0		0	+65°
3-4	<input type="checkbox"/>	<input type="checkbox"/>													
1-2	<input type="checkbox"/>	<input type="checkbox"/>													
Cont. Pos.	-65°	0													
	0	+65°													

↑ Other versions available on request

Dimensions

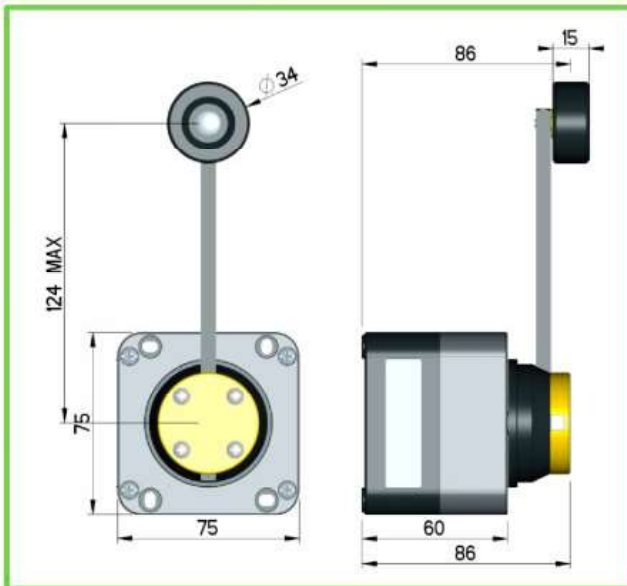

Characteristics

Standards	IEC/EN 60947/3	
Case	self extinguishing housing V0 UL94	
Protection class IEC/EN 60529	IP65 (double insulation <input type="checkbox"/>)	
Cam switch	enclosed thermal current [Ithe]	20A
	rated insulation voltage [Ui]	690V
	product ID	PX20 Giovenzana line
	contacts	double gap positive opening
	markings	
Cable entry	1xM20 + 1xM16	
Versions	single speed motor configuration (other configuration on request)	
Notes	- fully adjustable metallic rods □ 6x120mm - reinforced mechanical stop - rubber covering wheel	

Reinforced mechanical stop insert




Section view



Rod adjusting guide

- I. Loosen the four screws (1)
- II. Adjust the rods
- III. Tighten the four screws (1)



Fixing holes

