




SWIFT (CHPL) HOIST BRAKE

**DC FAIL SAFE BRAKE
"SLDC" SERIES**

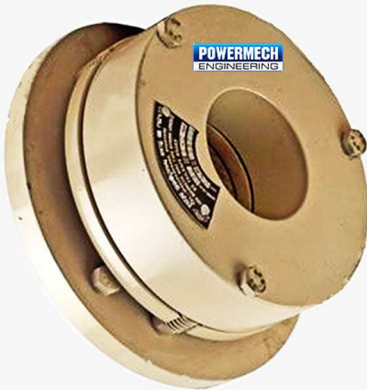

DC FAIL SAFE BRAKE "DCCH" SERIES



Details of Brake SLDC

MODEL SLDC	WATTS AT 24 V.DC.	TORQUE KG-M	FLANGE DIA in mm	No. of teeth in Gear Hub
80	22	0.25	105	18
100	25	0.6	125	18
110	35	1.0	140	22
130	40	2.0	160	27
150	75	3.0	185	24
170	70	5.0	205	24
195	60	8.0	250	27
230	60	14.0	300	27
265	125	25.0	350	36

Details of Brake DCCH

MODEL DCCH	WATTS AT 110 VDC	TORQUE KG-M	FLANGE DIA in mm
DCCH-13	45	1.0	235
DCCH-15	45	2.2	295
DCCH-17	75	3.0	290
DCCH-19	65	5.6	290
DCCH-23	50	8.4	310

Note:


- Standard Voltage is 110 VDC.
- Other DC Voltage (24 VDC, 42 VDC) at extra price.

Note:

- Brake is Supplied with Standard mounting plate.
- Driving gear hub Is provided with pilot bore.
- Standard Voltage is 24 VDC.
- Other DC Voltage (Voltage 42, 90, 190 VDC) are available on request at extra price.

Other types of brakes are also supplied:

AC SOLENOID BRAKE



EMCO BRAKE



AC DISC BRAKE

