




Brake Model 'AC'

- 1) Electromagnet
- 2) Armature plate
- 3) Adjusting screw
- 4) Torque springs
- 5) Splined hub
- 6) Disc
- 7) O-ring
- 8) Braking torque adjusting screw
- 9) Fixing screws

E-mail : info@powermechengineering.com
 Website : www.powermechengineering.in / com

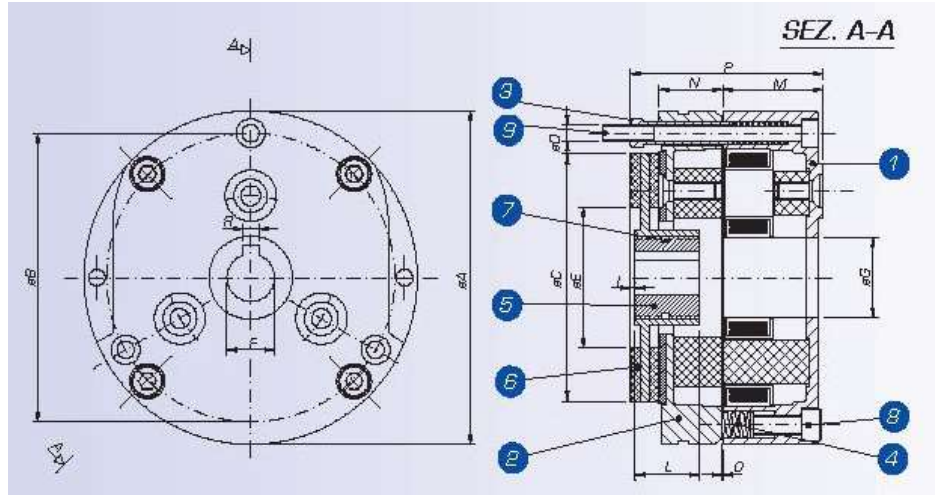

Tipo Brake Model	AC1	AC2	AC3	AC4	AC5	AC6	AC7	AC8	AC8/D	
Static Braking Torque (Nm)	4.5	10	15	20	40	60	90	200	400	
Max Speed Motor (rpm)	3600	3600	3600	3600	3600	3600	3600	1800	1800	
Input Power (W)	17	22	27	27	39	61	69	134	134	
Input Power (VA)	40	70	85	120	160	300	500	600	600	
Braking moment of inertia of the brake(Kg. cm2)	0.3	0.8	1.1	3	7,6 ALL	16	30	60	120	
	G-AL	G-AL	G-AL	3	11,5 C40	C 40	C 40	C 40	C 40	
Max noisiness (dB-A)	68	69	70	69	70	70	70	70	70	
Weight (Kg.)	1.2	1.8	2.3	3	5	7.5	11.5	15	19	
A	85	105	115	125	148	162	189	218	218	
B	72	90	103	112	132	145	170	196	196	
C	61	77	88	98	119	128	151	176	176	
D	3Xm4	3xm5	3xm5	3xm6	3xm6	3xm8	3xm8	6xm10	6xm10	
E	35	44	62	69	79	80	90	90	103	
Tolerance hole till AC3 H7, other +/-0,01	F	11-10	14-11	da 11	da 14	24-25	25-30	25-30	da 24	da 24
		12	15	a 20	a 25	28	34	34	a 45	a 45
G	15	20	22	26	30	32	43	48	48	
I	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	
L	18	20	20	20	25	30	30	40	40-60	
M	31,5	31,5	31,5	34	39	41	51	54	54	
N	14	20,5	20,5	26,5	29,5	33	35	44	44	
O min/max	0,15-0,5	0,2-0,6	0,2-0,6	0,2-0,7	0,2-0,7	0,2-0,7	0,2-0,7	0,2-0,7	0,2-0,7	
P	53,5	60	60,5	69	78,5	82,5	97	105	125	



Phone : 044 - 24715461
 044 - 42614058
 E-mail: info@powermechengineering.com

EOT CRANE PARTS, BRAKES, DSL BUSBAR, CURRENT COLLECTORS, FESTOON SYSTEM, CABLES, LIMIT SWITCH, PENDANT STATIONS, PENDANT CABLES, FLAT CABLES, CRANE HOOKS, BOTTOM HOOK PULLEY BLOCKS, SAFETY LATCH, ETC.,