

# Pendant stations

P02-PTRM Series pendant stations for small hoist applications  
IP65 □ Single / Dual speed

www.powermechengineering.in

www.powermechengineering.com

## P02

2 directions  
mechanically interlocked

### ENGRAVING

Single / Dual speed

### DESCRIPTION

### CODE

### WEIGHT gr

### DIMENSIONS



For single speed motor control

n° 2 push buttons with 1 NO contact

n° 2 push buttons with 2 NO contact

n° 2 push buttons with 1NC+1NO contact

P02.1

230

P02.2

250

P02.4

250

For two-speeds motor control

n° 2 push buttons with NO contacts

P02.D2


250

For 1kW single-phase motor control

n° 2 push-buttons with  
1NC+1NO contacts blocks

P02.CD

230

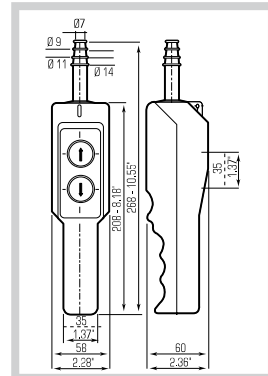

Code P02K, Enclosures in kit for contact blocks and operators, see codes to page 19  
for assembly instructions see page 15




For single speed motor control

n° 1 emergency stop  
EN ISO 13850  
mushroom Ø 30  
turn to release

P02.RM

230

n° 1 two way and  
off switch with  
spring return  
16A - 250V ac 1/2 HP

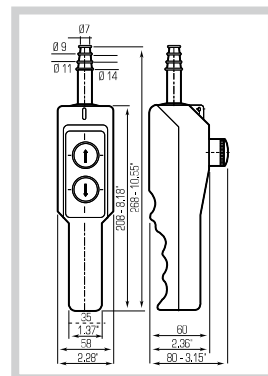

## PTRM

### ENGRAVING

### DESCRIPTION

### CODE

### WEIGHT gr

### DIMENSIONS



For single speed motor control

Arranged execution for  
capacitor 45X90 Ø Max

PTRM

230

n° 1 emergency stop EN ISO 13850  
mushroom Ø 30  
turn to release

n° 1 two way  
and off switch  
with spring return  
16A - 250V ac 1/2 HP

